

General Specifications

Model MU5D Universal Temperature Converter (2-output, Free Range Type)





GS 77J04U05-02E

■ General

The MU5D is a plug-in type universal temperature converter that converts input signal (thermocouple, RTD or mV signal) into isolated DC current or DC voltage signals.

- Selection of input type(thermocouple, RTD or mV signal), I/O range setting, burnout setting, output adjustment, I/O monitoring, and loop back test can be made using the optional Parameter Setting Tool (VJ77) or Handy Terminal (JHT200).
- The operation indicating lamp shows the operation status, abnormalities in a setting etc.
- Output adjustment, wiring resistance correction, and ON/OFF of RJC can be made using the switches on the front panel of the MU5D without a setting tool such as Handy Terminal.
- For the Fahrenheit display, specify the option “/DF”.

■ Model and Suffix Codes

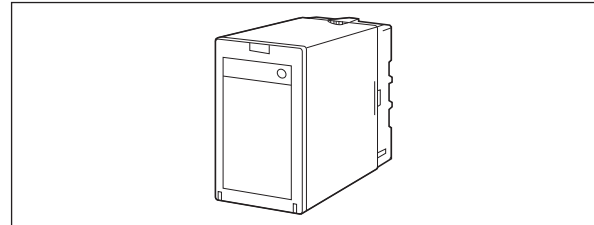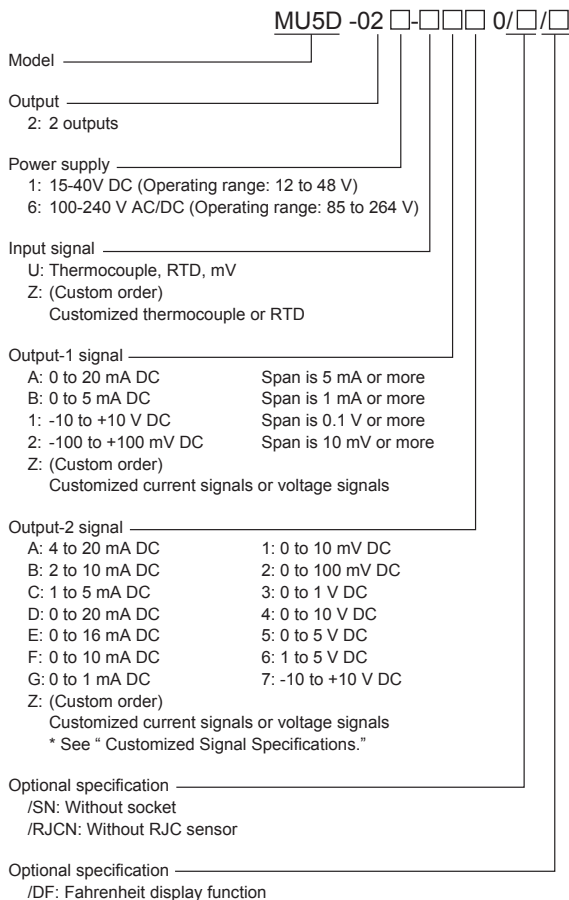

■ Ordering Information

Specify the following when ordering.

- Model and suffix codes: e.g. MU5D-026-UAA0
- Input type: e.g. Pt100 (ITS-90)
- Input range: e.g. 0 to 100 °C
- Output-1 range: e.g. 4 to 20 mA DC
- Burnout: e.g. Up

The universal temperature converter will be shipped with an input type of Pt100 (ITS-90) and an input range of 0 to 100°C if no specification of input type and input range.

■ Input/Output Specifications

Input signal:

Thermocouple: Type K, T, E, J, R, S, B, N (ITS-90: JIS'97), W3^(Note1), W5^(Note2)

(Note1)W97Re3-W75Re25
(Tungsten97% Rhenium 3% - Tungsten75% Rhenium25%)
The abbreviation of ASTM E988 Standard.

(Note2) W95Re5-W74Re26
(Tungsten95% Rhenium 5% - Tungsten74% Rhenium 26%)
The abbreviation of ASTM E988 Standard.

RTD:

Pt100 (ITS-90: JIS'97), JPt100 (JIS'89)
Pt50 (JIS'81), Pt100 (IPTS68: JIS'89)
Pt100 (ITS-90): $R_0 = 100 \Omega$, $R_{100} / R_0 = 1.3851$
JPt100 (JIS'89): $R_0 = 100 \Omega$, $R_{100} / R_0 = 1.3916$
Pt100 (IPTS-68): $R_0 = 100 \Omega$, $R_{100} / R_0 = 1.3850$

mV DC signal: -500 to +500 mV DC

Measuring unit: °C, K, °F^(*), mV

*1: When specify the option code "/DF".

Input type and measuring range:

| Input type (thermocouple) | Measuring range (°C) |
|---------------------------|-------------------------|
| Type K | -270 to +1372 |
| Type T | -270 to +400 |
| Type E | -270 to +1000 |
| Type J | -210 to +1200 |
| Type R | -50 to +1768 |
| Type S | -50 to +1768 |
| Type B | 0 to +1820 |
| Type N | -270 to +1300 |
| Type W3 | 0 to +2300 |
| Type W5 | 0 to +2300 |
| Input type (RTD) | Measuring range (°C) |
| Pt100 (ITS-90) | -200 to +850 |
| Pt100 (IPTS-68) | -200 to +660 |
| JPt100 (JIS'89) | -200 to +510 |
| Pt50 (JIS'81) | -200 to +649 |
| Input type (mV DC) | Measuring range (mV DC) |
| mV | -500 to +500 |

Measuring span: 3 mV or more (thermocouple, mV signal), 10°C or more (RTD)
 Input resistance: 1 MΩ during power on; 10 kΩ during power off (thermocouple, mV signal)
 Input external resistance:
 Thermocouple, mV signal: 500 Ω or less
 However, this resistance value can be added to the BARD600 internal resistance when the converter is used with BARD600.
 RTD: Input span (°C) x 0.4 Ω or less / wire or 10 Ω, whichever is smaller.
 However, this resistance value can be added to the BARD700 internal resistance when the converter is used with BARD700.
 RTD detective current: Approx. 0.7 mA
 Maximum allowable input: ±4 V DC
 Output signal: 2 points of DC current or DC voltage signals
 Output-1 signal setting range:

| Output-1 signal suffix code | Setting range |
|-----------------------------|------------------------------------|
| A | 0 to 20 mA DC Span is 5 mA or more |
| B | 0 to 5 mA DC Span is 1 mA or more |
| 1 | ±10 V DC Span is 0.1 V or more |
| 2 | ±100 mV DC Span is 10 mV or more |

Allowable load resistance:
 Voltage output: 2 kΩ or more for ±5 V DC
 10 kΩ or more for ±10 V DC
 250 kΩ or more for ±100 mV DC
 Current output: Output-1 15 (V)/max. output (A) (Ω) or less
 Output-1 7 (V)/max. output (A) (Ω) or less
 Adjustment range: (Common to output-1 and output-2)
 Input adjustment: ±1% of span or more (Zero/Span)
 Output adjustment: ±5% of span or more (Zero/Span)

■ Standard Performance

Accuracy rating: ±0.1% of span
 However, the accuracy is not guaranteed for output levels less than 0.5% of the span of a 0 to X mA output range type.
 The accuracy is limited according to the input/output range settings.
 For thermocouple, add the accuracy of RJC to the calculated accuracy.

• Accuracy Calculation
Accuracy = Input accuracy + Output accuracy (%)
 (Output accuracy for output-2 is ±0.05%.)

[Input accuracy]

<Thermocouple>

- ±0.1% of span or ±1°C, whichever is greater when the following range is included.
 Type K, E and T: Less than -200°C
 Type B: 400°C to less than 600°C
 Type E and J: More than 750°C
 Type N: More than 1200°C
- ±0.1% of span or ±2°C, whichever is greater when the following range is included.
 Type N: Less than -200°C
- Accuracy is not guaranteed for less than 400°C of Type B.
- When the measuring range is ±20 mV in thermoelectromotive force, substitute 10 for Tm of the following expression. When ±100 mV, substitute 40. An obtained value is applied as an input accuracy.
 $T_m / \text{measuring span (mV)} \times \text{input accuracy}^*$
 *: Any of ±0.1%, ±1°C or ±2°C.
- Type K, E, T and N: For the measured temperatures less than -200°C, add the following coefficient (Te) to the input accuracy mentioned above. An obtained value is the input accuracy.
 $T_e [°C] = (-200 [°C] - \text{measured temp. } [°C]) / X$
 (X=10 for Type K, T, and E; X=5 for Type N)
- Accuracy of reference junction compensation (RJC):

Other than Type R and S: ±1°C (0 to 50°C)
 Type R and S: ±2°C (0 to 50°C)
 Type K, E, T and N: For the measured temperatures less than -200°C, multiply the input accuracy mentioned above by K, where K=(Thermocouple output change/°C near 0°C)/(Thermocouple output change/°C at measured temperature)

<RTD>

±0.05% of span or ±0.05°C, whichever is greater.
 For Pt50 (JIS'81), ±0.1% of span or ±0.1°C, whichever is greater.

<mV signal>

Compare the specified input range with the input range in the table below (narrower range) and choose accuracy calculation conditions. However, $\pm 0.05\%$ is applied if an input accuracy obtained from the expression is less than $\pm 0.05\%$.

Input accuracy = $\pm 0.05\% \times a/b$

| Input range | Accuracy calculation condition | |
|---|--------------------------------|------------|
| | a | b |
| ± 20 mV DC | 10(mV) | Input span |
| ± 100 mV DC | 40(mV) | |
| Outside of ± 100 mV DC and within ± 500 mV DC | 200(mV) | |

[Output-1 accuracy]

Compare the specified output-1 range with the output-1 range in the table below (narrower range) and choose accuracy calculation conditions. However, $\pm 0.05\%$ is applied if an output accuracy obtained from the expression is less than $\pm 0.05\%$.

Output-1 accuracy = $\pm 0.05\% \times a/b$

| Output-1 signal suffix code | Output range | Accuracy calculation condition | |
|-----------------------------|--|--------------------------------|-------------|
| | | a | b |
| A | 0 to 20 mA DC | 10(mA) | Output span |
| B | 0 to 5 mA DC | 2.5(mA) | |
| 1 | ± 2.5 V DC | 1(V) | |
| | Outside of ± 2.5 V DC and within 10 V DC | 4(V) | |
| 2 | ± 25 mV DC | 10(mV) | |
| | Outside of ± 25 mV DC and within ± 100 mV DC | 40(mV) | |

- Burnout: Up, Down or Off; the maximum burnout time is specified as 60 seconds.
- Response speed: 150 ms, 63% response (10 to 90%)
- Effect of power supply voltage fluctuations: $\pm 0.1\%$ of span or less for the fluctuation within the operating range of each power supply voltage specification.
- Effect of ambient temperature change: $\pm 0.15\%$ of span or less for a temperature change of 10°C.
- Effect of leadwire resistance change:
 - Thermocouple: $\pm 15 \mu\text{V}$ or less for a change of 100 Ω
 - RTD: $\pm 0.2^\circ\text{C}$ or less for a change of 10 Ω /wire.

■ Power Supply and Isolation

- Power supply rated voltage:
 - 15-40 V DC \approx or
 - 100-240 V AC/DC \approx 50/60 Hz
- Power supply input voltage:
 - 15-40 V DC \approx ($\pm 20\%$) or
 - 100-240 V AC/DC \approx ($-15, +20\%$) 50/60 Hz
- Power consumption:
 - 24 V DC 2.3 W, 110 V DC 2.2W
 - 100 V AC 4.6 VA, 200 V AC 6.4VA
- Insulation resistance:
 - 100 M Ω at 500 V DC between input, output, power supply, and grounding terminals mutually.
- Withstand voltage:
 - 2000 V AC for 1 minute between input, output, power supply and grounding terminals mutually.
 - 1000 V AC for 1 minute between output-1 and output-2.

■ Environmental Conditions

- Operating temperature range: 0 to 50°C
- Operating humidity range: 5 to 90% RH (no condensation)
- Operating conditions: Avoid installation in such environments as corrosive gas like sulfide hydrogen, dust, sea breeze and direct sunlight.
- Installation altitude: 2000 m or less above sea level.

■ Mounting and Dimensions

- Construction: Plug-in type
- Material: Main unit : ABS resin (black), UL94 V-0
 ABS resin + polycarbonate resin (black), UL94 V-0
 PBT resin, including glass fiber (black), UL94 V-0
- Socket: Modified polyphenylene oxide resin, including glass fiber (black), UL94 V-1
- Mounting: Wall or DIN rail mounting
- Connection: M3.5 screw terminals
- External dimensions: 86.5 (H) x 51 (W) x 123 (D) mm (including a socket)
- Weight: Main unit: approx. 200 g
 Socket: approx. 80 g

■ Accessories


- Spacer: One (for DIN rail mounting)
- Range label: One
- RJC sensor: One (except for "/RJCN")

■ Customized Signal Specifications

| Output-2 | Current signal | Voltage signal |
|-------------------|----------------|----------------|
| Output range (DC) | 0 to 20 mA | -10 to +10 V |
| Span (DC) | 1 to 20 mA | 10 mV to 20 V |


■ Front Panel

Output adjustment, wiring resistance correction, and ON/OFF of RJC can be made using the selection switch and adjustment switch.

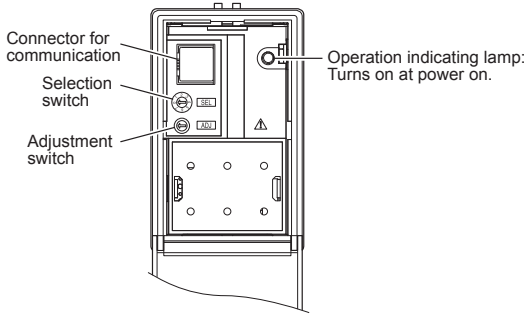


| Position of selection switch | Item to be adjusted |
|------------------------------|------------------------------|
| 0 | No function |
| 1 | Output-1 zero adjustment |
| 2 | Output-1 span adjustment |
| 3 | Output-2 zero adjustment |
| 4 | Output-2 span adjustment |
| 5 | Wiring resistance correction |
| 7 | ON/OFF of RJC |

■ Terminal Assignments




| Terminal No. | Signal name | Thermocouple | RTD | mV signal |
|--------------|-------------|------------------|-------|-----------|
| 1 | OUTPUT-1 | | (+) | |
| 2 | OUTPUT-2 | | (-) | |
| 3 | N.C | | | |
| 4 | INPUT | RJC reverse side | (A) | |
| 5 | INPUT | (+) | (B) | (+) |
| 6 | INPUT | (-) [RJC] | (B) | (-) |
| 7 | SUPPLY | | (L+) | |
| 8 | SUPPLY | | (N-) | |
| 9 | GND | | (GND) | |
| 10 | OUTPUT-2 | | (+) | |
| 11 | OUTPUT-2 | | (-) | |


■ Block Diagrams

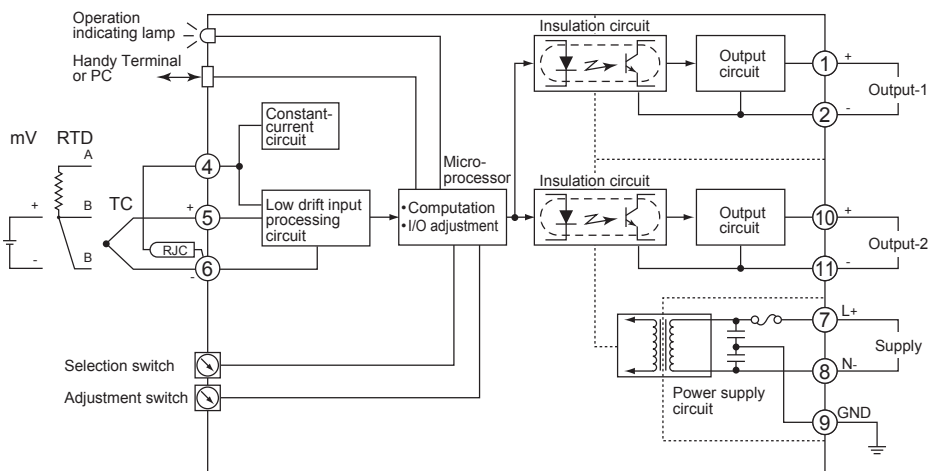

■ External Dimensions

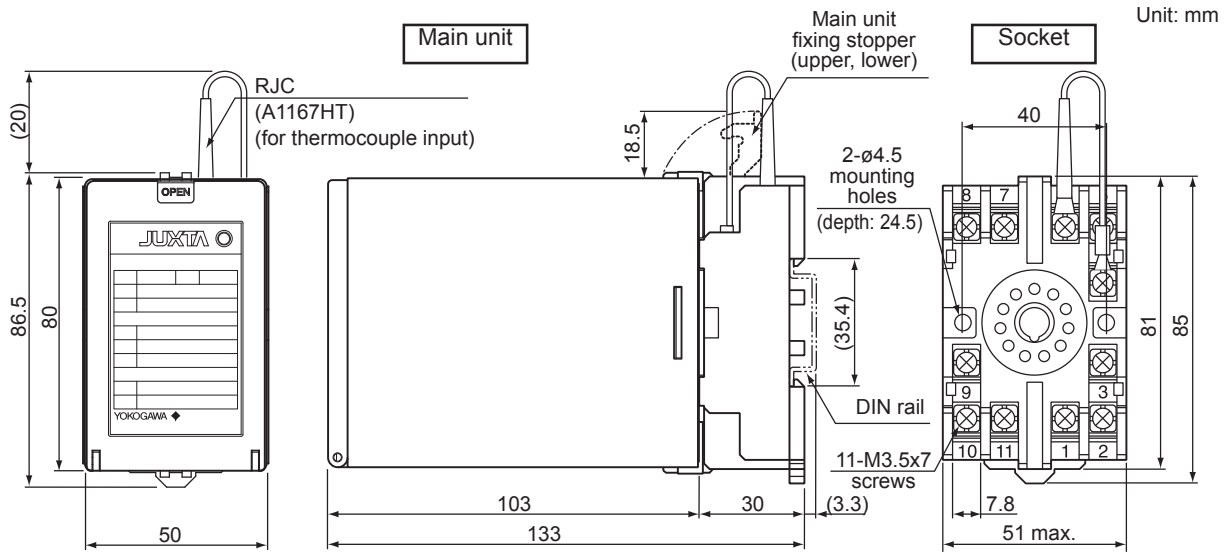

<Mounting Dimensions>

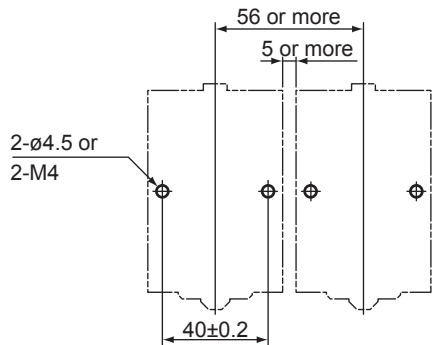

Note:

- When mounting the units close together, leave a space of at least 5mm between them.
- Use the supplied spacer to keep a space of 5 mm for DIN rail mounting.

• The information covered in this document is subject to change without notice for reasons of improvements in quality and/or performance.