

General Specifications

YTA70P Temperature Transmitter



GS 01C50C05-01EN

The YTA70P is a Panel mount type of temperature transmitter that accepts thermocouples, RTDs, ohms or DC millivolts input and converts it to a 4 to 20 mA DC signal for transmission. The YTA70P conforms to the standard DIN rail mounting. The YTA70P supports HART® communication protocol.

HART protocol revision is HART 7, and it features long tag number up to 32 characters, enhanced burst mode and event notification, and command aggregation function.



■ STANDARD SPECIFICATIONS

Accuracy

See Table 1.

Cold Junction Compensation Accuracy (For T/Cs only)

±1°C (±1.8°F)

Ambient Temperature Effects

See Table 1.

Power Supply Effects

±0.005% of FS per Volt

EMC Conformity

CE: EN61326-1, EN61326-2-3, EN 55011

KC: Korea Electromagnetic Conformity standard.
Class A

RCM: EN61326-1, EN 55011

RoHS conformity: EN50581

Input Type, Span and Range

Selection from thermocouples (T/Cs), 2-, 3-, and 4-wire RTDs, ohms and DC millivolts.

See Table 1.

Maximum Zero offset

±50% of selected maximum value

Input Resistance (for thermocouples, mV)

10 MΩ, or 3 kΩ at power-off

Input Lead Wire Resistance (for RTDs, ohms)

5 Ω per wire or lower

(up to 50 Ω per wire is configurable with reduced measurement accuracy)

Sensor Burnout

High (NAMUR NE43 upscale), Low (NAMUR NE43 downscale) or value within 3.5 to 23 mA

Output

Two wire 4 to 20 mA DC

Response Time

1 to 60 seconds programmable

Ambient Temperature Limits

(Option code may affect limit)

-40 to 60°C (-40 to 140°F)

Ambient humidity limits

0% to 95% RH (non-condensation)

Isolation

Input/output isolated to 1500 V AC.

Supply & Load Requirements:

Voltage

8 to 35 V DC for operation

(8 to 30 V DC for Intrinsically safe type)

13.8 to 35 V DC for digital communication

Load Resistance

0 to (E-8)/0.0236 [Ω]

where E is power supply voltage.

250 to 600 Ω for digital communication

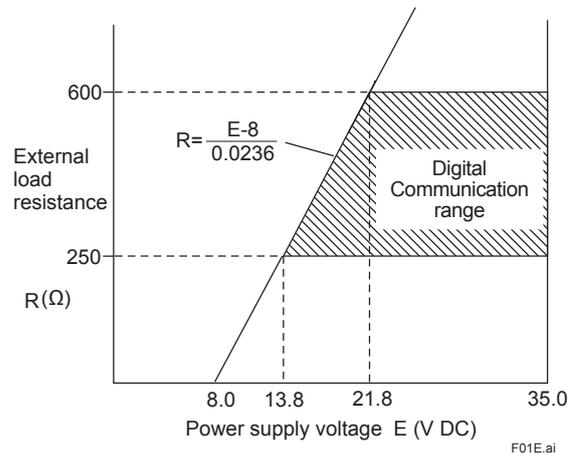


Figure 1. Relationship Between Power Supply Voltage and External Load Resistance

Enclosure Material

Polycarbonate

Mounting

DIN rail: DIN EN 60715 - 35 mm

Wire size

0.13...2.08 mm² / AWG26...14 stranded wire

Weight

150 g (0.33 lb)

MODEL AND SUFFIX CODES


Model	Suffix Codes	Descriptions
YTA70P	Temperature Transmitter (Panel Mount Type)
Output Signal	-J	4 to 20 mA DC with digital communication (HART 7 protocol)
-	A	Always A
Optional Specifications	/V2S	ATEX, FM, IECEx, and CSA Intrinsically safe approval Pending

Table 1. Input type, range and accuracy


Sensor Type	Standard	Input range		Minimum Span		Accuracy (value whichever is greater)	Temp. effects/10°C (value whichever is greater)	
		°C	°F	°C	°F			
<T/Cs>								
B	IEC584	400 to 1820	752 to 3308	200	360	±0.1% of span or ±1.0°C	±0.05% of span or ±1.0°C	
E		-100 to 1000	-148 to 1832	50	90			
J		-100 to 1200	-148 to 2192	50	90	±0.1% of span or ±0.5°C	±0.05% of span or ±0.25°C	
K		-180 to 1372	-292 to 2502	50	90			
N		-180 to 1300	-292 to 2372	100	180	±0.1% of span or ±1.0°C	±0.05% of span or ±1.0°C	
R		-50 to 1760	-58 to 3200	200	360			
S		-50 to 1760	-58 to 3200	200	360	±0.1% of span or ±0.5°C	±0.05% of span or ±0.25°C	
T		-200 to 400	-328 to 752	50	90			
L		DIN43710	-100 to 900	-148 to 1652	50	90	±0.1% of span or ±1.0°C	±0.05% of span or ±1.0°C
U			-200 to 600	-328 to 1112	75	135		
Lr	GOST 3044-84	-200 to 800	-328 to 1472	50	90	±0.1% of span or ±1.0°C	±0.05% of span or ±1.0°C	
W3	ASTM	0 to 2300	32 to 4172	200	360			
W5	E988-90	0 to 2300	32 to 4172	200	360			
<RTDs>								
Pt100	IEC751	-200 to 850	-328 to 1562	10	18	±0.1% of span or ±0.1°C	±0.05% of span or ±0.05°C	
Ni100	DIN43760	-60 to 250	-76 to 482	10	18			±0.1% of span or ±0.2°C
DC millivolts [mV]		-800 to 800 [mV]		2.5 [mV]		±0.1% of span or ±0.01mV	±0.05% of span or ±5µV	
Resistance [Ω]		0 to 7000 [Ω]		25 [Ω]		±0.1% of span or ±0.1Ω	±0.05% of span or ±0.05Ω	

Note: In T/Cs type B, the minimum range value can be set from 0°C. However, the accuracy between 0 to 400°C is not specified.

■ DIMENSIONS

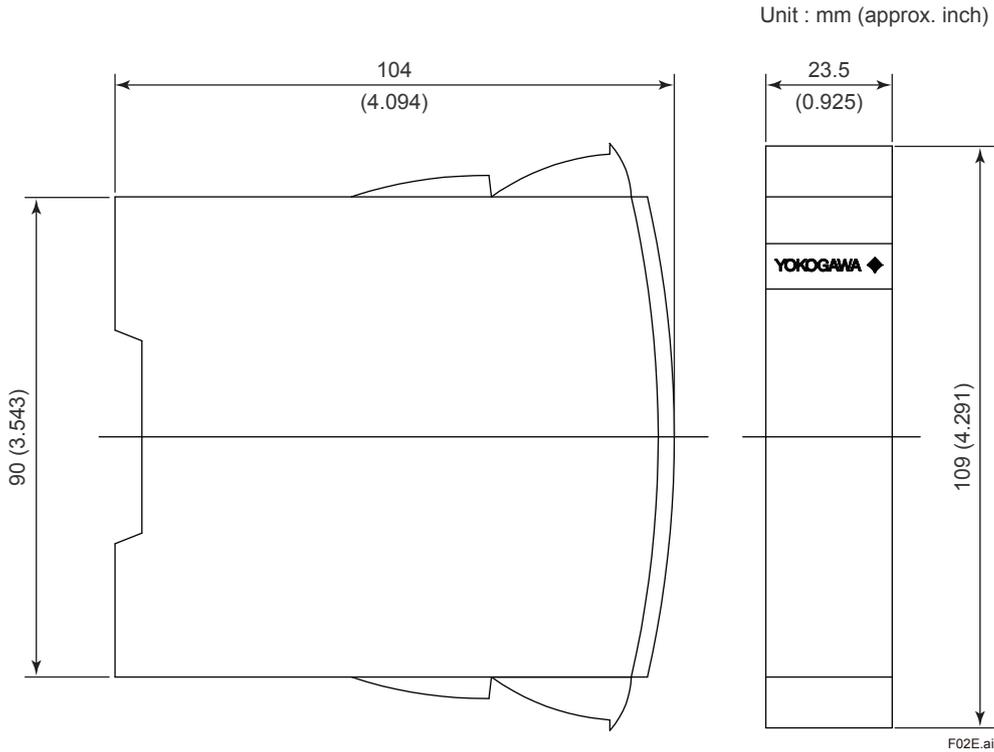

● Wiring Diagram

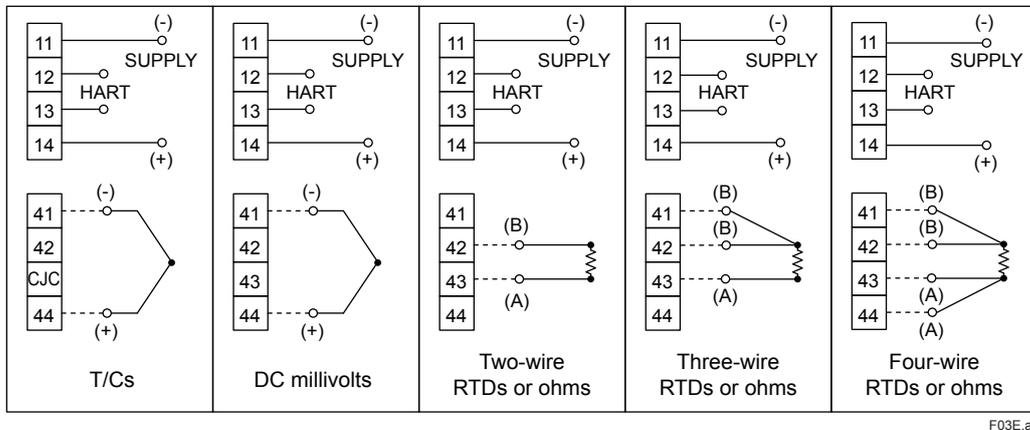

< Ordering Information >

Specify Model, suffix, and optional specification codes when ordering. If necessary, also specify the followings;

1. Sensor type. For RTDs and ohms input, specify the number of wire together.
2. Calibration range and unit.
3. Sensor Burnout: High or Low
4. Response time: An integral number from 1 to 60.

Model YTA70P will be shipped with the following settings from the factory if not specified upon ordering;

- Sensor type: Pt100, 3-wire
- Range: 0 to 100 °C
- Sensor Burnout: High
- Response time: 1 s

These setting contents are listed in a main body label.

< Reference >

HART; Trademark of the HART Communication Foundation.